

## **ANALYSIS AND DESIGN OF HIGH-RISE BUILDING (G+30) USING STAAD.PRO**

***BORUGADDA RAJU 1\*, Mr. R.RATTAIAH 2\****

- 1. II.M.Tech , Dept of CIVIL, AM Reddy Memorial College of Engineering & Technology, Petlurivaripalem.*
- 2. Asst.Prof,Dept. of CIVIL, AM Reddy Memorial College of Engineering & Technology, Petlurivaripalem.*

### **ABSTRACT**

Design and Analysis of high rise Building (G+30) using of staad pro in limit state method analysis of staad pro methods used in STAAD-Pro analysis are Limit State Design conforming to Indian Standard Code of Practice. STAAD.Pro features a state-of-the-art user interface, visualization tools, powerful analysis and design engines with advanced finite element and dynamic analysis capabilities. From model generation, analysis and design to visualization and result verification, STAAD.Pro is the professional's choice. Initially we started with the analysis of simple 2 dimensional frames and manually checked the accuracy of the software with our results. The results proved to be very accurate. We analysed and designed a G + 7 storey building [2-D Frame] initially for all possible load combinations [dead, live, wind and seismic loads].

STAAD.Pro has a very interactive user interface which allows the users to draw the frame and input the load values and dimensions. Then according to the specified criteria assigned it analyses the structure and designs the members with reinforcement details for RCC frames. We continued with our work with some more multi-storeyed 2-D and 3-D frames under various load combinations. Our final work was the proper analysis and design of a G + 30 3-D RCC frame under various load combinations.

We considered a 3-D RCC frame with the dimensions of 4 bays @5m in x-axis and 3 bays @5m in z-axis. The y-axis consisted of G + 30 floors. The total numbers of beams in each floor were 28 and the numbers of columns were 16. The ground floor height was 4m and rest of the 21 floors had a height of 3.0m. The structure was subjected to self weight, dead load, live load, wind load and seismic loads under the load case details of STAAD.Pro. The wind load values were generated by STAAD.Pro considering the given wind intensities at different heights and strictly abiding by the specifications of IS 875. Seismic load calculations were done following IS 1893-2000. The materials were specified and cross-sections of the beam and column members were assigned. The supports at the base of the structure were also specified as fixed. The codes of practise to be followed were also specified for design purpose with other important details. Then STAAD.Pro was used to analyse the structure and design the members. In the post-processing mode, after completion of the design, we can work on the structure and study the bending moment and shear force values with the generated diagrams. We may also check the deflection of various members under the given loading combinations. The design of the building is dependent upon the minimum requirements as prescribed in the Indian Standard Codes. The minimum requirements pertaining to the structural safety of buildings are being covered by way of laying down minimum design loads which have to be assumed for dead loads, imposed loads, and other external loads, the structure would be required to bear. Strict conformity to loading standards recommended in this code, it is hoped, will ensure the structural safety

of the buildings which are being designed. Structure and structural elements were normally designed by Limit State Method.

Complicated and high-rise structures need very time taking and cumbersome calculations using conventional manual methods. STAAD.Pro provides us a fast, efficient, easy to use and accurate platform for analysing and designing structures.

## **INTRODUCTION**

Our project involves analysis and design of multi-storeyed [G + 30] using a very popular designing software STAAD Pro. We have chosen STAAD Pro because of its following advantages:

- easy to use interface,
- conformation with the Indian Standard Codes,
- versatile nature of solving any type of problem,
- Accuracy of the solution.

STAAD.Pro features a state-of-the-art user interface, visualization tools, powerful analysis and design engines with advanced finite element and dynamic analysis capabilities. From model generation, analysis and design to visualization and result verification, STAAD.Pro is the professional's choice for steel, concrete, timber, aluminium and cold-formed steel design of low and high-rise buildings, culverts, petrochemical plants, tunnels, bridges, piles and much more.

STAAD.Pro consists of the following:

The STAAD.Pro Graphical User Interface: It is used to generate the model, which can then be analyzed using the STAAD engine. After analysis and design is completed, the GUI can also be used to view the results graphically.

The STAAD analysis and design engine: It is a general-purpose calculation engine for structural analysis and integrated Steel, Concrete, Timber and Aluminum design.

To start with we have solved some sample problems using STAAD Pro and checked the accuracy of the results with manual calculations. The results were to satisfaction and were accurate. In the initial phase of our project we have done calculations regarding loadings on buildings and also considered seismic and wind loads.

Structural analysis comprises the set of physical laws and mathematics required to study and predicts the behavior of structures. Structural analysis can be viewed more abstractly as a method to drive the engineering design process or prove the soundness of a design without a dependence on directly testing it.

To perform an accurate analysis a structural engineer must determine such information as structural loads, geometry, support conditions, and materials properties. The results of such an analysis typically include support reactions, stresses and displacements. This information is then compared to criteria that indicate the conditions of failure. Advanced structural analysis may examine dynamic response, stability and non-linear behavior.

The aim of design is the achievement of an acceptable probability that structures being designed will perform satisfactorily during their intended life. With an appropriate degree of safety, they should sustain all the loads and deformations of normal construction and use and have adequate durability and adequate resistance to the effects of seismic and wind. Structure and structural elements shall normally

be designed by Limit State Method. Account should be taken of accepted theories, experiment and experience and the need to design for durability. Design, including design for durability, construction and use in service should be considered as a whole. The realization of design objectives requires compliance with clearly defined standards for materials, production, workmanship and also maintenance and use of structure in service.

The design of the building is dependent upon the minimum requirements as prescribed in the Indian Standard Codes. The minimum requirements pertaining to the structural safety of buildings are being covered by way of laying down minimum design loads which have to be assumed for dead loads, imposed loads, and other external loads, the structure would be required to bear. Strict conformity to loading standards recommended in this code, it is hoped, will not only ensure the structural safety of the buildings which are being designed

#### **LOADS CONSIDERED**

##### **DEAD LOADS:**

All permanent constructions of the structure form the dead loads. The dead load comprises of the weights of walls, partitions floor finishes, false ceilings, false floors and the other permanent constructions in the buildings. The dead load loads may be calculated from the dimensions of various members and their unit weights. the unit weights of plain concrete and reinforced concrete made with sand and gravel or crushed natural stone aggregate may be taken as 24 kN/m<sup>3</sup> and 25 kN/m<sup>3</sup> respectively.

##### **IMPOSED LOADS:**

Imposed load is produced by the intended use or occupancy of a building including the weight of movable partitions, distributed and concentrated loads, load due to impact and vibration and dust loads. Imposed loads do not include loads due to wind, seismic activity, snow, and loads imposed due to temperature changes to which the structure will be subjected to, creep and shrinkage of the structure, the differential settlements to which the structure may undergo.

##### **WIND LOAD:**





Wind is air in motion relative to the surface of the earth. The primary cause of wind is traced to earth's rotation and differences in terrestrial radiation. The radiation effects are primarily responsible for convection either upwards or downwards. The wind generally blows horizontal to the ground at high wind speeds. Since vertical components of atmospheric motion are relatively small, the term 'wind' denotes almost exclusively the horizontal wind, vertical winds are always identified as such. The wind speeds are assessed with the aid of anemometers or anemographs which are installed at meteorological observatories at heights generally varying from 10 to 30 metres above ground.

##### **Design Wind Speed (V<sub>d</sub>)**

The basic wind speed (V<sub>b</sub>) for any site shall be obtained from and shall be modified to include the following effects to get design wind velocity at any height (V<sub>d</sub>) for the chosen structure:

- a) Risk level;
- b) Terrain roughness, height and size of structure; and
- c) Local topography.

**RESULTS:**

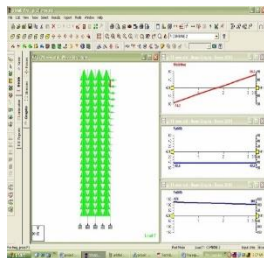

**CONCLUSION**



STAAD PRO has the capability to calculate the reinforcement needed for any concrete section. The program contains a number of parameters which are designed as per IS: 456(2000). Beams are designed for flexure, shear and torsion.

**Design for Flexure:**

Maximum sagging (creating tensile stress at the bottom face of the beam) and hogging (creating tensile stress at the top face) moments are calculated for all active load cases at each of the above mentioned sections. Each of these sections are designed to resist both of these critical sagging and hogging moments. Where ever the rectangular section is inadequate as singly reinforced section, doubly reinforced section is tried.

**Design for Shear:**

Shear reinforcement is calculated to resist both shear forces and torsional moments. Shear

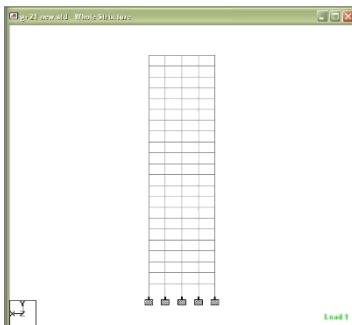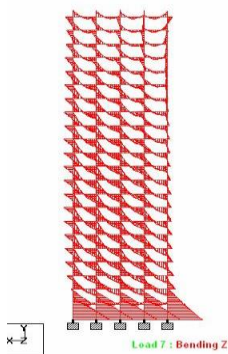

capacity calculation at different sections without the shear reinforcement is based on the actual tensile reinforcement provided by STAAD program. Two-legged stirrups are provided to take care of the balance shear forces acting on these sections.

#### Beam Design Output:

The default design output of the beam contains flexural and shear reinforcement provided along the length of the beam.

#### Column Design:

Columns are designed for axial forces and biaxial moments at the ends. All active load cases are tested to calculate reinforcement. The loading which yield maximum reinforcement is called the critical load. Column design is done for square section. Square columns are designed with reinforcement distributed on each side equally for the sections under biaxial moments and with reinforcement distributed equally in two faces for sections under uni-axial moment. All major criteria for selecting longitudinal and transverse reinforcement as stipulated by IS: 456 have been taken care of in the column design of STAAD.

#### REFERENCE

Dr. S.R. Karve & Dr. V.L. Shah - "Illustrated design of Reinforced concrete Buildings"

N. Krishna Raju - "Advanced Reinforced Concrete design"

"STAAD Pro 2004 – Getting started & tutorials"-  
Published by: R .E. I.

"STAAD Pro 2004 – Technical reference manual"- Published by: R.E.I.IS 875 - BUREAU OF INDIAN STANDARDSMANAK BHAVAN, 9

BAHADUR SHAH ZAFAR MARG NEW DELHI 110002

IS 456 - BUREAU OF INDIAN STANDARDSMANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARGNEW DELHI 110002

IS1893-2000 - BUREAU OF INDIAN STANDARDSMANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARGNEW DELHI 110002  
IS 1893-2002 - BUREAU OF INDIAN STANDARDSMANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARGNEW DELHI 110002